

ESPANSIONE Mod. FI – LBE FOAM NOZZLES LOW EXPANSION Mod. FI – LBE



CARATTERISTICHE COSTRUTTIVE

Corpo: acciaio inox

Ugello: ottone

A RICHIESTA

Attacchi filettati GAS
Fattore K da specificare


CONSTRUCTION FEATURES

Body: stainless steel

Nozzle: brass

OPTIONAL

GAS threaded connection
K factor to be confirmed

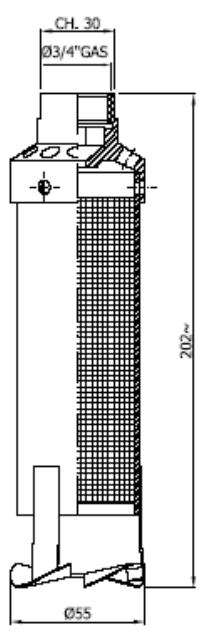

MODELLO	PORTATA MAX.	PRESSIONE ESERCIZIO	RESA SCHIUMA	PESO
MODEL	MAX.FLOW RATE	WORKING PRESSURE	FOAM PRODUCTION	WEIGHT
	l/min. – 5 bar		l/min. (max)	Kg.
FI – LBE	150	2 ÷ 8	700	0,8

